


ZON[®]

Ventilation fans



Range of Quality products

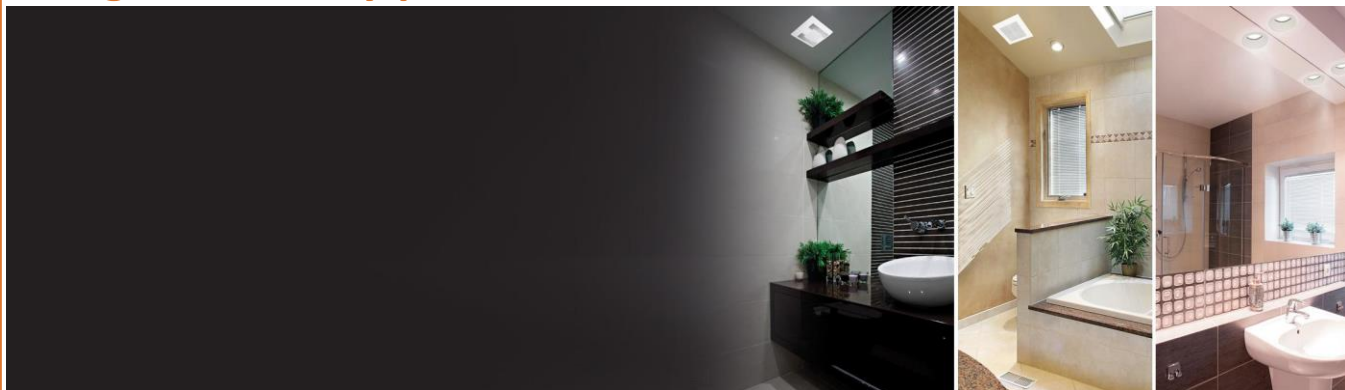

Copied but never Equaled



OVF-A

Duct Ventilation fan

Voltage: 220-240, 50/60Hz

Humidity: 40~100%



Professional Motor




Multi Design Blade

Specification


Model	Size	Power	[CMH]	[dB]	[mm]
OVF-A4	4"	15w	160	37	100
OVF-A5	5"	20w	195	39	120
OVF-A6	6"	25w	320	41	150

Parameter

Model	Size-mm			
	A	B	C	D
OVF-A4	150x150	42	45	98
OVF-A5	180x180	44	44	118
OVF-A6	209x209	45	60	148

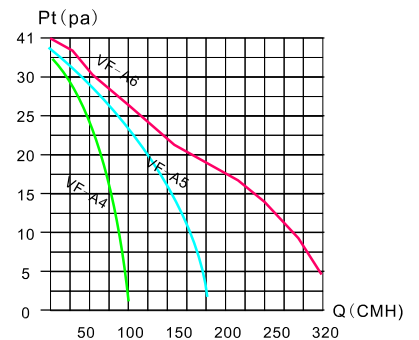

Installation

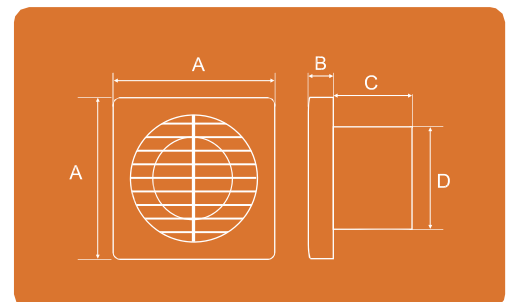



OVF-E

Duct Ventilation fan

Voltage: 220-240, 50/60Hz

Humidity: 40~100%



Professional Motor




Multi Design Blade

Specification


Model	Size	Power	[CMH]	[dB]	[mm]
OVF-E4	4"	12w	80	37	100
OVF-E5	5"	15w	150	39	120
OVF-E6	6"	20w	250	41	150

Parameter

Model	Size-mm			
	A	B	C	D
OVF-E4	160x160	25	72	100
OVF-E5	175x175	28	74	115
OVF-E6	212x212	30	76	150

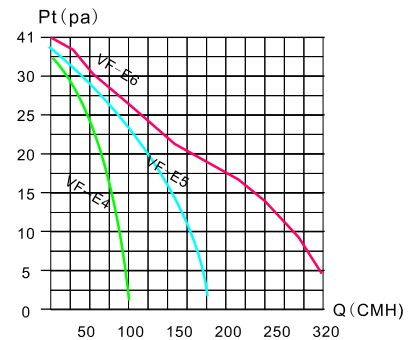

Installation

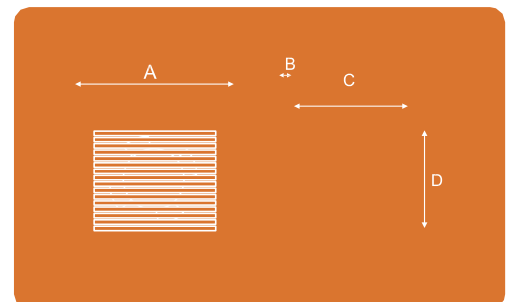



OVF-N


Duct Ventilation fan

Voltage: 220-240, 50/60Hz

Humidity: 40~100%



Professional Motor



ultra thin panel design

Specification


Model	Size	Power	[CMH]	[dB]	[mm]
OVF-N4	4"	12w	80	37	100
OVF-N5	5"	15w	150	39	120
OVF-N6	6"	20w	250	41	150

Parameter

Model	Size-mm			
	A	B	C	D
OVF-N4	158x158	21	55	98
OVF-N5	178x178	22	68	115
OVF-N6	209x209	21	71	148



Installation

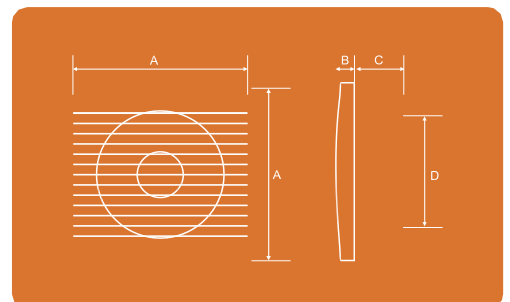



OVF-M

Duct Ventilation fan

Voltage: 220-240, 50/60Hz

Humidity: 40~100%



Professional Motor



Multi Design Blade




Hot Switch

Specification


Model	Size	Power	[CMH]	[dB]	[mm]
OVF-M4	4"	12w	80	37	100
OVF-M5	5"	15w	150	39	120
OVF-M6	6"	20w	250	41	150

Parameter

Model	Size-mm			
	A	B	C	D
OVF-M4	150x150	37	42	98
OVF-M5	180x180	44	44	115
OVF-M6	209x209	45	60	148

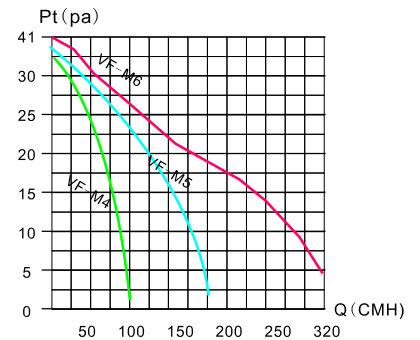

Installation

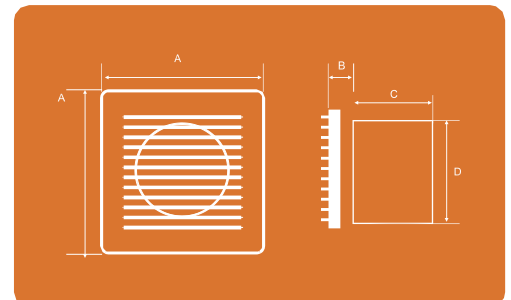



OVF-K

Auto Shutter Ventilation fan

Voltage: 220-240, 50/60Hz

Humidity: 40~100%



Professional Motor




Multi Design Blade

Speci cation

Model	Size	Power	[CMH]	[dB]	[mm]
OVF-K6	6"	20w	250	47	155
OVF-K8	8"	28w	480	49	235

Parameter

Model	Size-mm			
	A	B	C	D
OVF-K6	210x210	25	90	155
OVF-K8	285x285	25	120	230

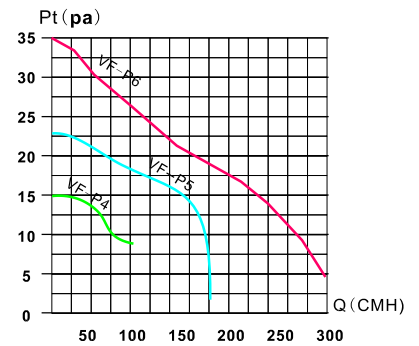

Installation



Model function




Standard



Pull cord




Timer



40~100% 1~20min

Humidity sensor

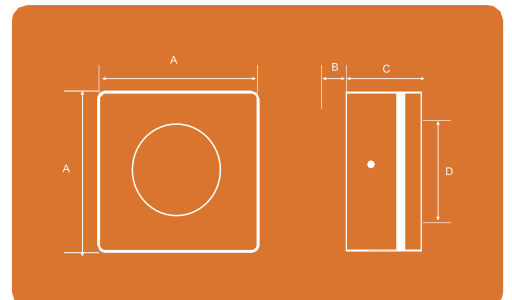



OVS-S


Auto Royal Ventilation fan

Voltage: 220-240, 50/60Hz

Humidity: 40~100%



Professional Motor




Multi Design Blade

Specification

Model	Size	Power	[CMH]	[dB]	[mm]
OVS-S4	4"	12w	80	33	100
OVS-S5	5"	15w	150	35	120
OVS-S6	6"	20w	250	37	150

Parameter

Model	Size-mm			
	A	B	C	D
OVS-S4	150x150	37	42	98
OVS-S5	180x180	44	44	115
OVS-S6	209x209	45	60	148

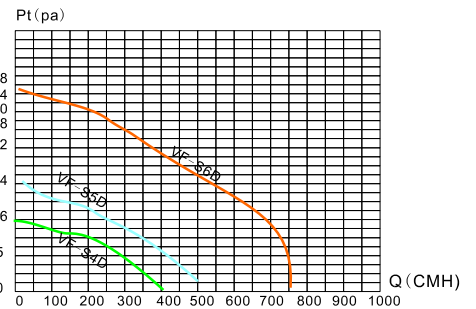

Installation



Model function



Standard



Pull cord




Timer



40~100% 1~20min



Humidity sensor

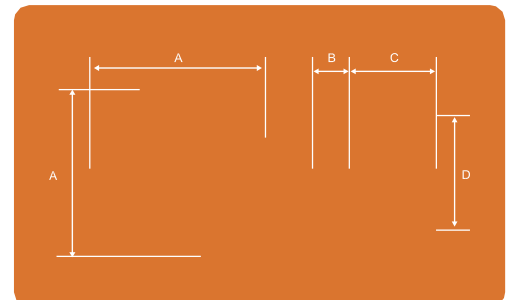



OVF-C

Round Glass Ventilation fan

Voltage: 220-240, 50/60Hz

Humidity: 40~100%



Environmental motor



PP engineering plastics

Specification


Model	Size	Power	[CMH]	[dB]	[mm]
OVF-C6	6"	15w	260	43	186
OVF-C8	8"	25w	420	45	248



Parameter

Model	Size-mm				
	A	B	C	D	E
OVF-C6	208x208	44	41	130	177
OVF-C8	272x272	50	54	180	238

Installation

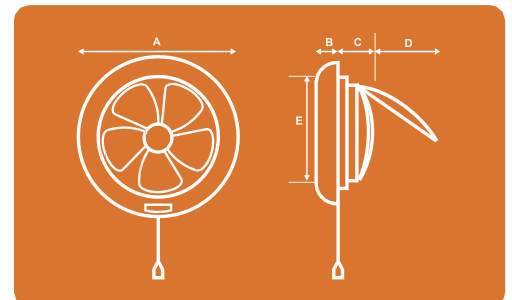



Mosquito and dust prevention

OVF-AS

Back Auto Shutter Ventilation fan

Voltage: 220-240, 50/60Hz

Humidity: 40~100%



Rear electric shutter




Hot Switch



Mutil-blade design

Specification


Model	Size	Power	[CMH]	[dB]	[mm]
OVF-AS6	6"	28w	260	46	186
OVF-AS8	8"	35w	420	48	250

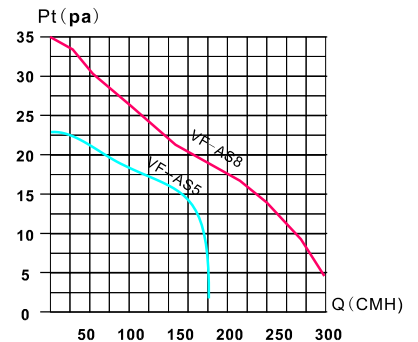

Parameter

Model	Size-mm			
	A	B	C	D
OVF-AS6	230x230	48	79	172
OVF-AS8	295x295	52	71	241

Installation

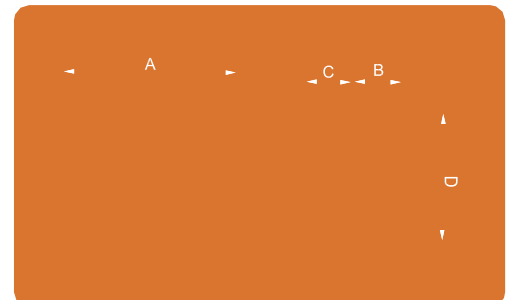



OVF-AP

Auto Royal Ventilation fan

Voltage: 220-240/50/60Hz

Humidity: 40~100%


Features of high pressure series
high static pressure,
Low power consumption



Two-way switch

Specification

Model	Size	Power	[CMH]	[dB]	[mm]
OVF-AP6	6"	24w	290	37	150
OVF-AP8	8"	28w	480	40	200
OVF-AP10	10"	38w	760	42	250
OVF-AP12	12"	46w	980	47	300

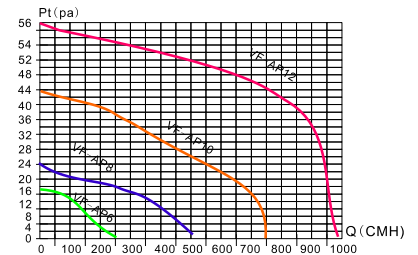



Parameter

Model	Size-mm			
	A	B	C	D
OVF-AP6	240x240	49	76	187
OVF-AP8	298x298	41	78	240
OVF-AP10	340x340	48	78	273
OVF-AP12	395x395	46	85	334

Installation







Model functions

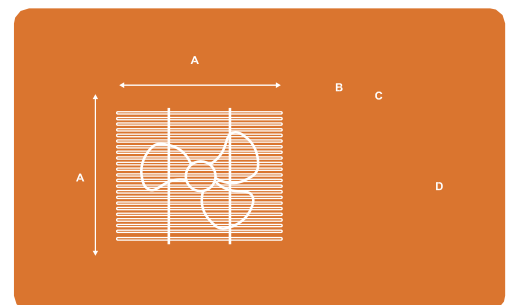



OVF-BB

Celling Metal Pipe Ventllatlon fan
Voltage: 220-240, 50/60Hz




Speciflcation

Model	Power	[m ³ /h]	[dB]	[mm]
OVF-BB1310	21w	100	36	180x180
OVF-BB1515	24w	150	37	230x230


Parameter - Size-mm

Model	A	B	C	D	E	F	G	H	I
OVF-BB1310	240	210	193	85	98	67	20	160	175
OVF-BB1515	300	278	255	85	98	97	12	182	235

Installation



Model functions

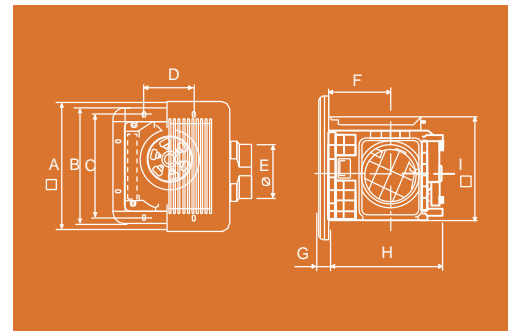

Range of Quality products

Copied but never Equaled

